

# WyreStorm

HDMI Splitter

Model No. SPL1T401

Operating Instructions P/N of these Instructions is INS- SPL1T401



## FEATURES

- 1) Easy to Use: Install in seconds, no need for setting.
- 2) Distribution: One HDMI Input, four identical HDMI outputs.
- 3) Standby function.
- 4) Support high definition resolutions 1080p, 1080i, 720p and other standard video formats.
- 5) HDCP compliant.
- 6) HDMI 1.3 version.

Dear customer:

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating, or adjusting this product. Please keep this manual for future reference.

## NOTICE

Wyrestorm reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

## WARNING:

TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK OR PRODUCT DAMAGE:

- 1) DO NOT EXPOSE THIS APPARATUS TO RAIN, MOISTURE, DRIPPING OR SPLASHING AND THAT NO OBJECTS FILLED WITH LIQUIDS, SUCH AS VASES, SHALL BE PLACED ON THE APPARATUS.
- 2) DO NOT INSTALL OR PLACE THIS UNIT IN A BOOKCASE, BUILT-IN CABINET OR IN ANOTHER CONFINED SPACE. ENSURE THE UNIT IS WELL VENTILATED.
- 3) TO PREVENT RISK OF ELECTRIC SHOCK OR FIRE HAZARD DUE TO OVERHEATING, DO NOT OBSTRUCT THE UNIT'S VENTILATION OPENINGS WITH NEWSPAPERS, TABLECLOTHS, CURTAINS, AND SIMILAR ITEMS.
- 4) DO NOT INSTALL NEAR ANY HEAT SOURCES SUCH AS RADIATORS, HEAT REGISTERS, STOVES, OR OTHER APPARATUS (INCLUDING AMPLIFIERS) THAT PRODUCE HEAT.
- 5) DO NOT PLACE SOURCES OF NAKED FLAMES, SUCH AS LIGHTED CANDLES, ON THE UNIT.
- 6) CLEAN THIS APPARATUS ONLY WITH DRY CLOTH.
- 7) UNPLUG THIS APPARATUS DURING LIGHTNING STORMS OR WHEN UNUSED FOR LONG PERIODS OF TIME.
- 8) PROTECT THE POWER CORD FROM BEING WALKED ON OR PINCHED PARTICULARLY AT PLUGS.
- 9) ONLY USE ATTACHMENTS/ACCESSORIES SPECIFIED BY THE MANUFACTURER.
- 10) REFER ALL SERVICING TO QUALIFIED SERVICE PERSONNEL.

## TABLE OF CONTENTS

Introduction  
Package Contents  
Panel Descriptions  
Connect and Operation  
Specification  
Typical Application  
Maintenance  
Product Service  
Warranty  
Contact Information

## INTRODUCTION

Wyrestorm's SPL1T401 is a four-way HDMI splitter. It distributes the input to four HDMI outputs. These four outputs are synchronized.

SPL1T401 has the ability of pre-emphasis and equalization. Series connection can achieve the more distance transmission than 15 meters.


SPL1T401 offers solutions for digital entertainment center, HDTV retail and show site, HDTV, STB, DVD and Projector factory, noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

## PACKAGE CONTENTS

- 1) Main unit. P/N\_ SPL1T401
  - 2) 5VDC Power Supply.P/N\_VDC0502
  - 3) Operating Insrtuctions.P/N\_INS- SPL1T401
- \* Cables are optional.

## PANEL DESCRIPTIONS

### Front Panel

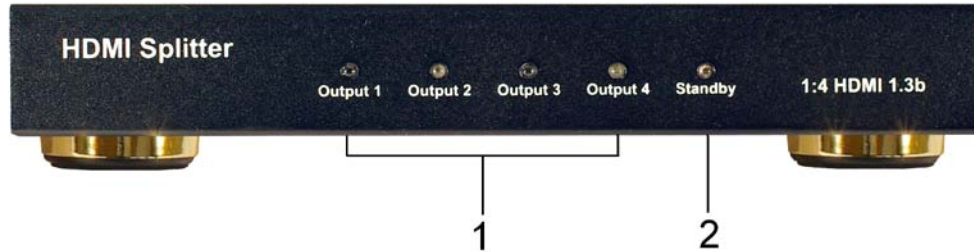


- 1) Output LED. When the output is connected, the corresponding LED will be light.
- 2) Indicator of standby. When the splitter operates normally, the dual color led is red, otherwise it will be green.
- 3) Dial switcher. Select output mode.

Function of the dial switcher:

JP1	JP2	JP3	Operating Mode
0	0	0	HDCP Repeated mode. EDID mix
0	0	1	HDCP Repeated mode. Copy EDID from the first detected output.
0	1	0	HDCP Repeated mode. HDMI1.2 output
0	1	1	HDCP Repeated mode. HDMI1.3 output

## Rear Panel

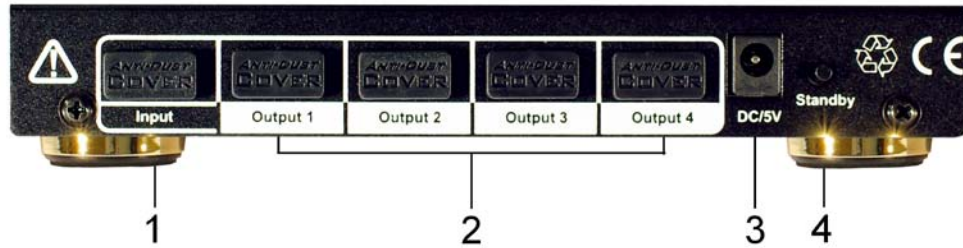

- 1) HDMI input.
- 2) HDMI output.
- 3) Power.
- 4) Standby key.

Function of standby key: control the splitter is on or standby.

### CONNECT AND OPERATE

- 1) Connect the HDMI input sources into SPL1T401. (Input cables are optional)
- 2) Connect the HDMI output equipments into SPL1T401. (Output cables are optional)
- 3) Insert the DC side of 5V power supply into SPL1T401 and then connect the AC side of the power supply into the wall outlet.
- 4) Turn on the power.

Attention: Insert / Extract cables gently.

## SPECIFICATIONS

Operating Temperature Range	-5 to +35°C(-41 to +95 °F)
Operating Humidity Range	5 to 90 % RH (no condensation)
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Signaling Rate	2.25Gbit/s
Video Format Supported	DTV/HDTV:1080P/1080i/ 720P/576P/480P/576i/480i
Output Video	HDMI1.2 and HDMI 1.3
Maximum Transmission Distance	<15m
Power Consumption	6watts (Max)
Dimensions	175mmL×113mmW×24mmH
Mass (Main Unit)	0.5kg
Operating temperature range	-5 to +35°C(-41 to +95°F)
Operating humidity range	5 to 90 % RH (no condensation)
Video Amplifier Bandwidth	140MHz
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Maximum Single Link Range	1080P
Video format supported:	VGA : 640x480,800x600, 1024x768,1280x1024
	DTV/HDTV: 480i/576i/480p/ 576p/720p/1080i/1080P
Output Video	HDMI
Power Consumption	6 Watts (max.)
Power Supply	5VDC
Dimensions	175mmW x 113mmH x 24mmD
Mass	0.5kg

Note: Specifications are subject to change without notice. Mass and dimensions are approximate.

## MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzine to clean this unit.

## PRODUCT SERVICE

- 1) Damage requiring service: The unit should be serviced by qualified service personnel if:
  - a) The DC power supply cord or AC adaptor has been damaged;
  - b) Objects or liquids have gotten into the unit;
  - c) The unit has been exposed to rain;
  - d) The unit does not operate normally or exhibits a marked change in performance;
  - e) The unit has been dropped or the cabinet has been damaged.
- 2) Servicing Personnel: Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.
- 3) Replacement parts: When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.
- 4) Safety check: After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.

## WARRANTY

If your product does not work properly because of a defect in materials or workmanship, Wyrestorm (referred to as “the warrantor”) will, for the length of the period indicated as below, (Parts and Labor (2) Year) which starts with the date of original purchase (“Limited Warranty period”), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the “Labor” Limited Warranty period there will be no charge for labor. During the “Parts” warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

### Mail-In Service

Please contact our customer service department describing the issue, and a new product will be sent to you immediately with an applicable charge. Please place the damaged

product in the new package and send back with the return shipping label provided. Once the damaged product is received, a reimbursement will be provided. Include a letter detailing the complaint and provide a day time phone and/or email address where you can be reached.

IF REPAIR IS NEEDED DURING THE LIMITED WARRANTY PERIOD THE PURCHASER WILL BE REQUIRED TO FURNISH A SALES RECEIPT/PROOF OF PURCHASE INDICATING DATE OF PURCHASE, AMOUNT PAID AND PLACE OF PURCHASE. CUSTOMER WILL BE CHARGED FOR THE REPAIR OF ANY UNIT RECEIVED WITHOUT SUCH PROOF OF PURCHASE.

#### LIMITED WARRANTY LIMITS AND EXCLUSIONS

1) This Limited Warranty ONLY COVERS failures due to defects in materials or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER failures which are caused by products not supplied by the warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, misadjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Servicenter or other Authorized Servicer, or damage that is attributable to acts of God.

2) THERE ARE NO EXPRESS WARRANTIES EXCEPT AS LISTED UNDER "LIMITED WARRANTY COVERAGE". THE WARRANTOR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the servicer, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive, but are for illustration only.)

3) PARTS AND SERVICE, WHICH ARE NOT COVERED BY THIS LIMITED WARRANTY, ARE YOUR RESPONSIBILITY.



Thank you for your purchase.

We appreciate your business. Please contact us with your question and comments.

WyreStorm  
6755 Buckles Cove  
Memphis, TN 38133

1-877-HDMI WYRE – Toll Free  
901-363-0111 – Office Phone  
901-363-0111 – Office Fax

Email: [info@wyrestorm.com](mailto:info@wyrestorm.com)

Website: [www.WyreStorm.com](http://www.WyreStorm.com)